LOC I-PTK	APP CRS	Rwy Idg	6200
111.1	092°	TDZE	980
		Apt Elev	980

ILS RWY 9R

PONTIAC/OAKLAND COUNTY INTL (PTK)

When control tower closed, obtain local altimeter setting on ATIS; when not received use Coleman A. Young Muni altimeter setting.

MALSR

MISSED APPROACH: Climb to 1400, then climbing right turn to 3000 direct SVM VORTAC and hold.

ATIS	DETROIT APP CON	PONTIAC TOWER ★	GND CON	CLNC DEL	UNICOM
125.45	127.5 363.2	120.5 (CTAF)	121.9	118.25	122.95

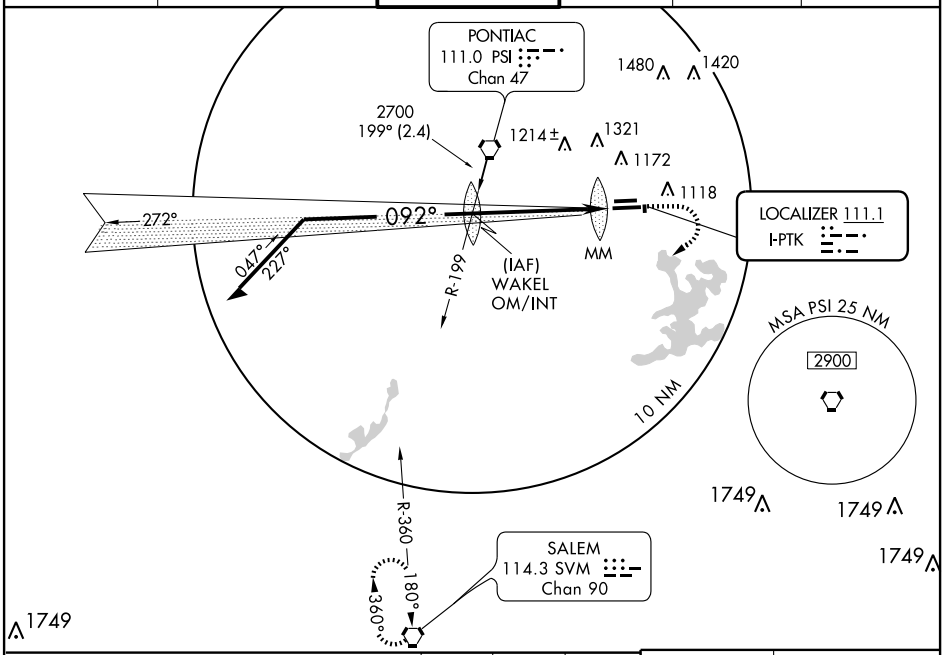

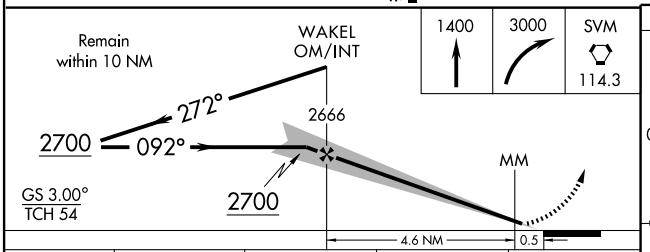



CATEGORY	A	B	C	D
S-ILS 9R		1180/24	200 (200-½)	
S-LOC 9R	1520/24	540 (600-½)	1520/50 540 (600-1)	1520/60 540 (600-1¼)
CIRCLING	1520-1	540 (600-1)	1520-1½ 540 (600-1½)	1680-2¼ 700 (700-2¼)
DETROIT CITY ALTIMETER SETTING MINIMUMS				
S-ILS 9R		1275-½	295 (300-½)	
S-LOC 9R	1620-½	640 (700-½)	1620-1¼ 640 (700-1¼)	1620-1½ 640 (700-1½)
CIRCLING	1620-1	640 (700-1)	1620-1¾ 640 (700-1¾)	1800-2¾ 820 (900-2¾)

HIRL Rwy 9R-27L (L)
MIRL Rwy 9L-27R
REIL Rwys 9L, 27L and 27R (L)

FAF to MAP 5.1 NM

Knots	60	90	120	150	180
Min:Sec	5:06	3:24	2:33	2:02	1:42

EC-1, 13 MAR 2008 to 10 APR 2008
EC-1, 13 MAR 2008 to 10 APR 2008